


## Маркировка модели теплообменников

VTS

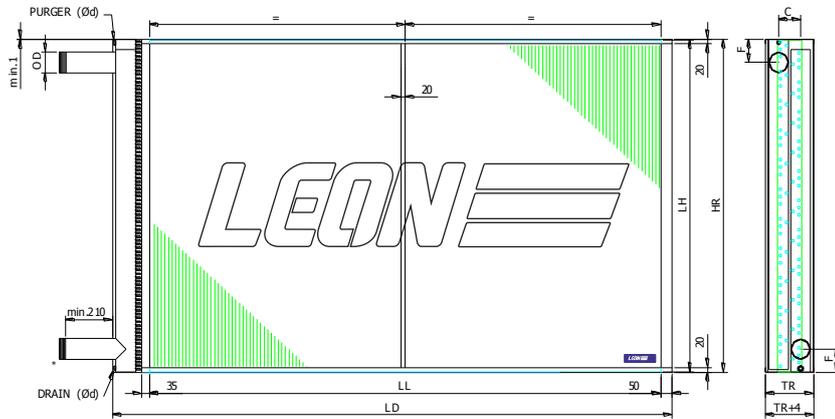

Type	LL	LD	LH	HR	C	F	TR	OD	Ød	Coil's weight [kg]	Volume [L]
	Dimensions [mm]										
VS 21 WCL 2	710	873	317.5	324	62	80	110	1"	1/8"	7.72	1.77
VS 21 WCL 4	710	873	317.5	324	82	80	145	1"	1/8"	12.68	3.54
VS 21 WCL 6	710	873	317.5	324	138	80	180	1"	1/8"	17.64	5.31
VS 21 WCL 8	710	873	317.5	324	193	80	250	1"	1/8"	22.58	7.08
VS 30 WCL 2	710	873	444.5	454	62	80	110	1"	1/8"	9.68	2.48
VS 30 WCL 4	710	873	444.5	454	82	80	145	1"	1/8"	16.13	4.96
VS 30 WCL 6	710	873	444.5	454	138	80	215	1 1/4"	1/4"	22.75	7.43
VS 30 WCL 8	710	873	444.5	454	193	80	250	1 1/4"	1/4"	29.22	9.91
VS 40 WCL 2	930	1080	444.5	454	62	80	110	1"	1/8"	11.82	3.25
VS 40 WCL 4	930	1080	444.5	454	82	80	145	1"	1/8"	20.08	6.49
VS 40 WCL 6	930	1080	444.5	454	138	80	215	1 1/4"	1/4"	28.2	9.74
VS 40 WCL 8	930	1080	444.5	454	193	80	250	1 1/4"	1/4"	36.37	12.98
VS 55 WCL 2	1050	1251	572	587	62	120	110	1 1/4"	1/8"	16.85	4.71
VS 55 WCL 4	1050	1251	572	587	82	120	145	1 1/4"	1/8"	26.82	9.42
VS 55 WCL 6	1050	1251	572	587	138	120	215	2"	1/4"	46.8	14.14
VS 55 WCL 8	1050	1251	572	587	193	120	285	2"	1/4"	56.71	18.85
VS 75 WCL 2	1190	1392	698.5	706	62	120	110	1 1/4"	1/8"	21.43	6.53
VS 75 WCL 4	1190	1392	698.5	706	83	120	145	1 1/4"	1/8"	34.86	13.05
VS 75 WCL 6	1190	1392	698.5	706	83	120	180	2"	1/4"	59.93	19.58
VS 75 WCL 8	1190	1392	698.5	706	138	120	285	2"	1/4"	73.43	26.11
VS 100 WCL 2	1370	1572	794	804	62	120	110	1 1/4"	1/8"	26.31	8.54
VS 100 WCL 4	1370	1572	794	804	82	120	145	2"	1/4"	54.97	17.08

Производство теплообменников VS WCL

VS 100 WCL 6	1370	1572	794	804	138	120	215	2"	1/2"	73.72	25.62
VS 100 WCL 8	1370	1572	794	804	193	120	285	3"	1/2"	101.89	34.15
VS 120 WCL 2	1600	1803	826	838	62	120	110	1 1/4"	1/4"	30.72	10.37
VS 120 WCL 4	1600	1803	826	838	82	120	180	2"	1/4"	63.27	20.74
VS 120 WCL 6	1600	1803	826	838	138	120	250	3"	1/2"	97.05	31.11
VS 120 WCL 8	1600	1803	826	838	138	120	285	3"	1/2"	117.54	41.48
VS 150 WCL 2	1780	1997	921	937	62	120	110	1 1/4"	1/4"	36.46	12.87
VS 150 WCL 4	1780	1997	921	937	82	120	180	2"	1/4"	74.78	25.74
VS 150 WCL 6	1780	1997	921	937	138	120	250	3"	1/2"	114.43	38.61
VS 150 WCL 8	1780	1997	921	937	138	120	285	3"	1/2"	139.89	51.47
VS 180 WCL 2	1790	1997	1112	1137	99	120	215	2"	1/4"	58.91	15.62
VS 180 WCL 4	1790	1997	1112	1137	99	120	215	3"	1/2"	104.01	31.24
VS 180 WCL 6	1790	1997	1112	1137	138	120	250	3"	1/2"	137.14	46.86
VS 230 WCL 2	2200	2405	1112	1137	99	120	215	3"	1/2"	90.72	19.2
VS 230 WCL 4	2200	2405	1112	1137	99	120	215	3"	1/2"	128.99	38.39
VS 230 WCL 6	2200	2405	1112	1137	138	120	250	3"	1/2"	171.4	57.59
VS 300 WCL 2	2290	2497	1429	1435	99	120	215	3"	1/2"	112.37	25.69
VS 300 WCL 4	2290	2497	1429	1435	99	120	215	3"	1/2"	162.68	51.38
VS 300 WCL 6	2290	2497	1429	1435	138	120	250	3"	1/2"	217.65	77.07
VS 400 WCL 2	2730	2997	1620	1663	99	120	215	3"	1/2"	137.56	34.71
VS 400 WCL 4	2730	2997	1620	1663	99	120	215	3"	1/2"	204.48	69.42
VS 400 WCL 6	2730	2997	1620	1663	138	120	250	3"	1/2"	276.83	104.13
VS 500 WCL 2	3290	3497	1652	1658	99	120	215	3"	1/2"	157.11	42.65
VS 650 WCL 2	3400	3609	2128	2134	99	120	215	3"	1/2"	197.04	56.79